




## Product Technical Info

### TIMING BEL KIT - TBK5094.01

BULLONE INGRANAGGIO ALBERO MOTORE	CRANKSHAFT GEAR BOLT
<p>Durante la sostituzione del kit distribuzione in oggetto è necessario sostituire anche il bullone dell'ingranaggio dell'albero motore (in figura CM).</p> <p>In base al tipo di motore potreste trovare 2 diversi tipi di bulloni che si differenziano nel passo della filettatura:</p> <p style="text-align: center;"><b>M12x1,5 oppure M12x1,75</b></p> <p>Durante l'intervento di sostituzione si raccomanda quindi di controllare il bullone smontato e procedere al montaggio del nuovo bullone avente la medesima filettatura.</p>	<p>While replacing the timing kit involved, the crankshaft gear bolt needs to be replaced as well (see Fig. CM).</p> <p>Depending on the type of engine there are two different types of bolt, with a different thread pitch:</p> <p style="text-align: center;"><b>M12x1.5 or M12x1.75</b></p> <p>During the replacement operation, it is recommended to check the disassembled bolt and re-assemble the new one having the same thread.</p>

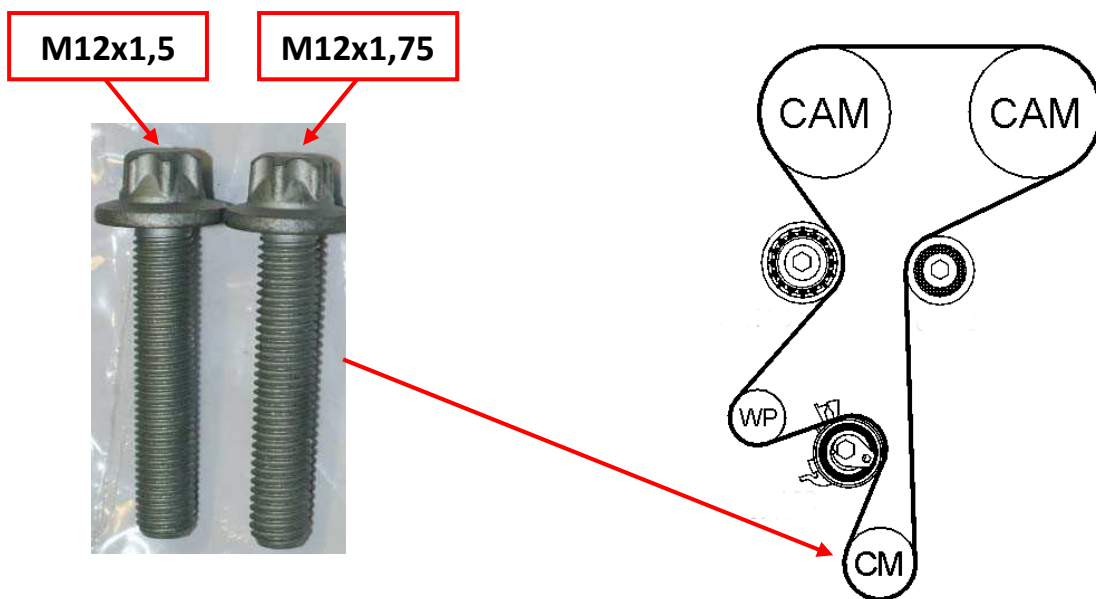

I suggerimenti e/o lo schema di montaggio eventualmente presente sono solo a titolo indicativo. La EXO Automotive Spa non si assume alcuna responsabilità derivante da eventuali errori e/o omissioni e/o modifiche successive apportate al sistema da parte del Costruttore del veicolo. Si consiglia altresì di avvalersi dei dati aggiornati forniti da quest'ultimo.

Recommendations and/or assembly diagram shown here are only for explanation purposes. EXO Automotive Spa doesn't accept any responsibility due to any later error and/or omission and/or modification made by the vehicle manufacturer to the system itself. It is further recommended to use state-of-the-art data supplied by the manufacturer.